


For Instructions, please see:

<http://www.erni.com/DB/derating/DERATING-Instructions.pdf>

DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)
D-Sub connector TMC 90° and 180° Ba 8 with 37 contacts
(Pressfit, SMT and THR termination)

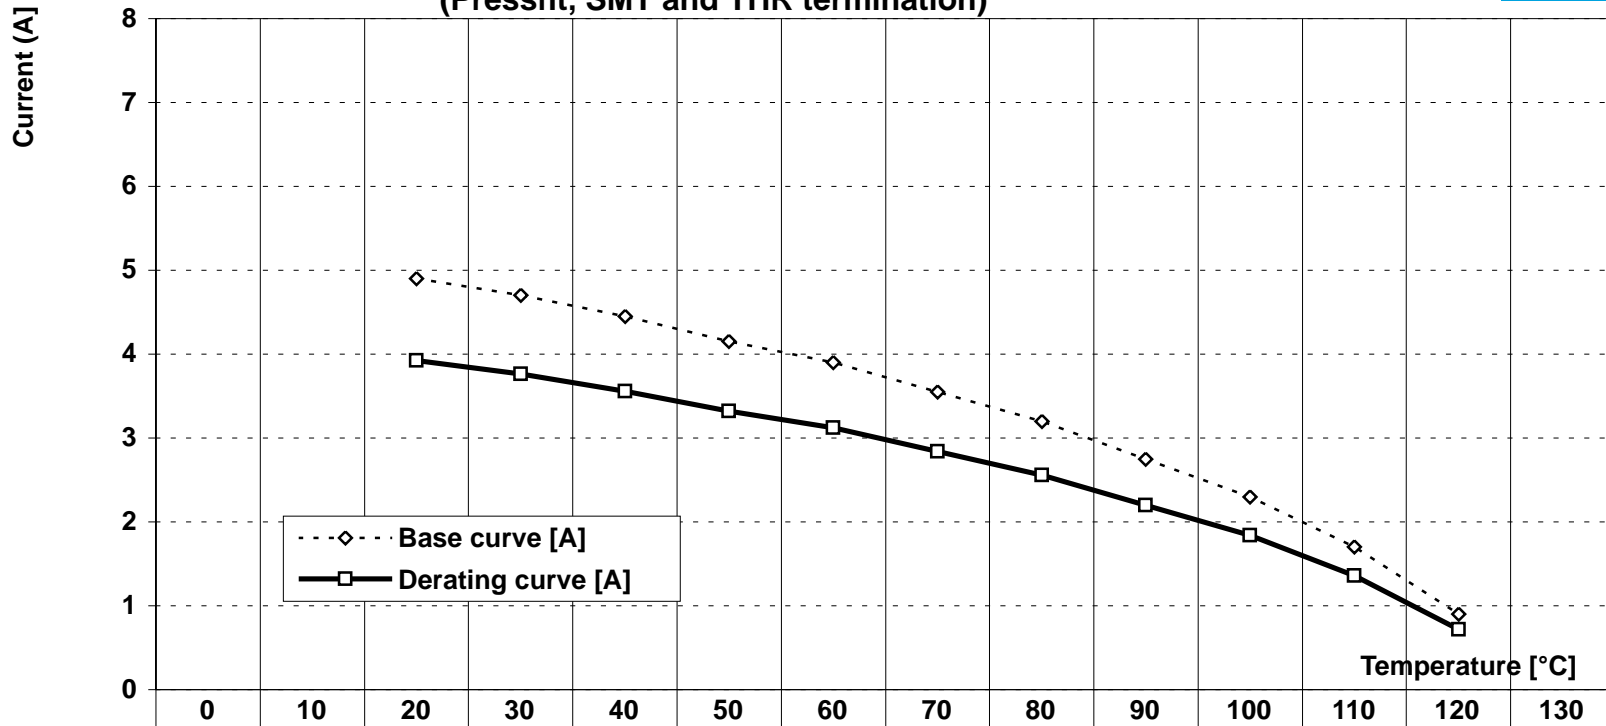

Base curve [A]			4,9	4,7	4,45	4,15	3,9	3,55	3,2	2,75	2,3	1,7	0,9	
Derating curve [A]			3,92	3,76	3,56	3,32	3,12	2,84	2,56	2,2	1,84	1,36	0,72	