


For Instructions, please see:

<http://www.erni.com/DB/derating/DERATING-Instructions.pdf>

**DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)
IEC 60603-2 connector F48 with 48 contacts**

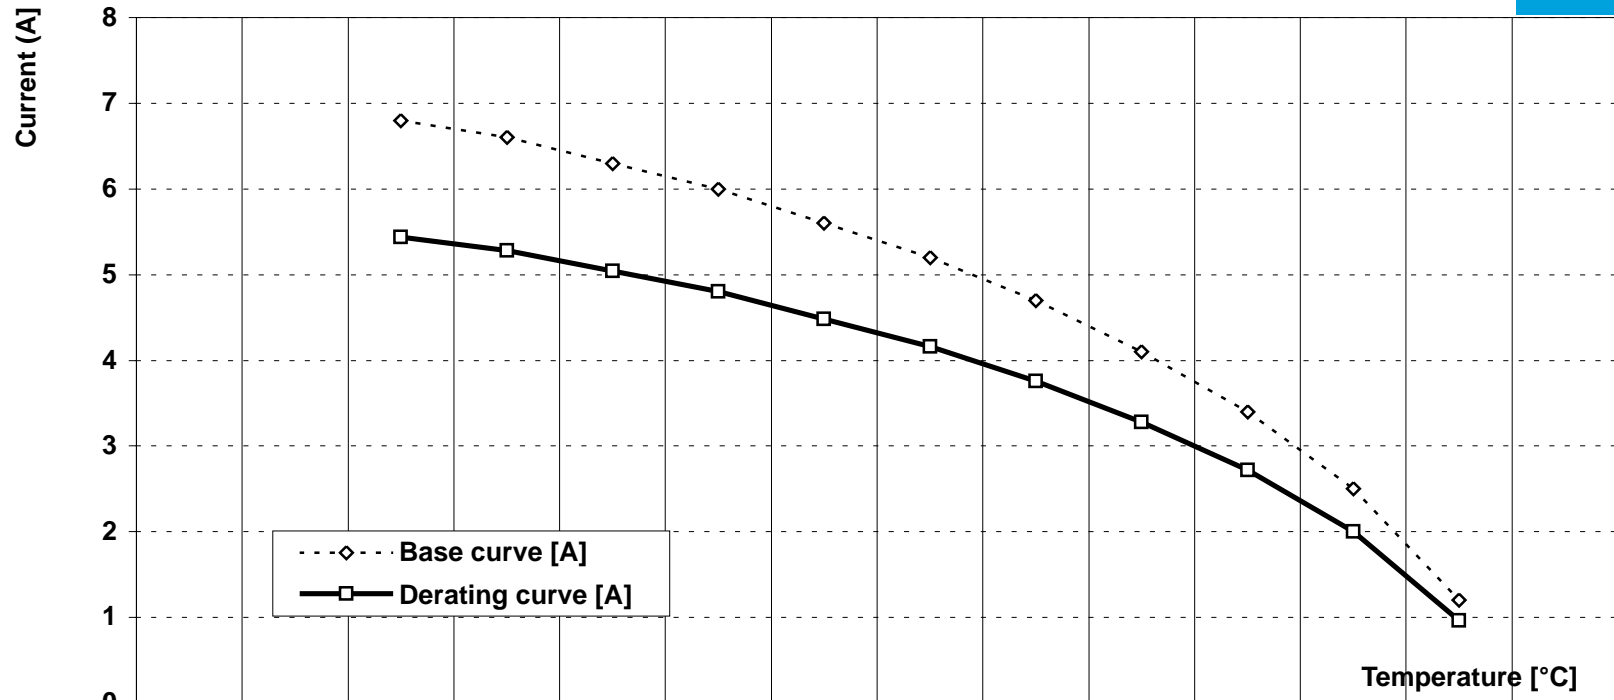

	0	10	20	30	40	50	60	70	80	90	100	110	120	130
Base curve [A]			6,8	6,6	6,3	6	5,6	5,2	4,7	4,1	3,4	2,5	1,2	
Derating curve [A]			5,44	5,28	5,04	4,8	4,48	4,16	3,76	3,28	2,72	2	0,96	