


For Instructions, please see:

<http://www.erni.com/DB/derating/DERATING-Instructions.pdf>

DERATING CURVE (Current carrying capacity acc. IEC 60512-2-5 Test 5b)
ERmet connector module B with 125 contacts

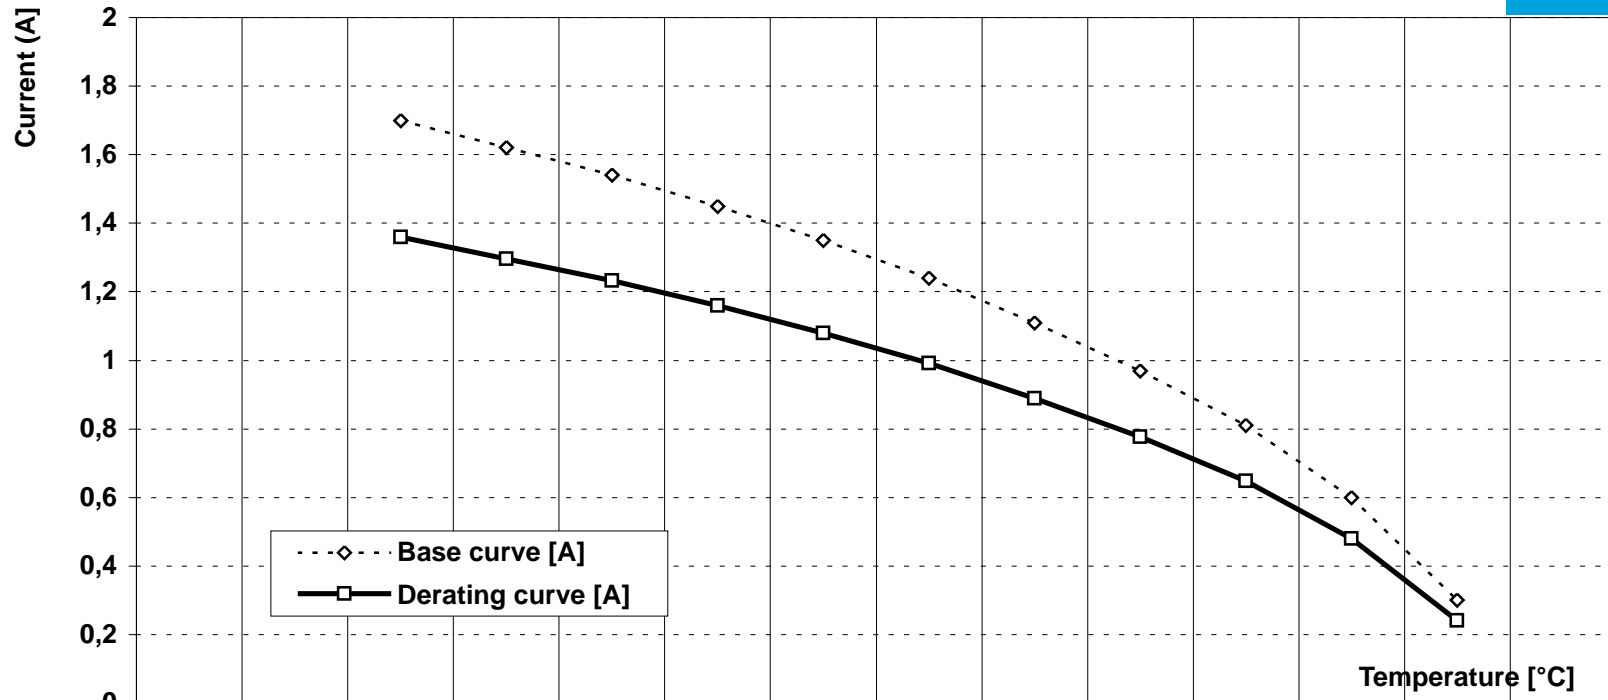

	0	10	20	30	40	50	60	70	80	90	100	110	120	130
Base curve [A]			1,7	1,62	1,54	1,45	1,35	1,24	1,11	0,97	0,81	0,6	0,3	
Derating curve [A]			1,36	1,296	1,232	1,16	1,08	0,992	0,888	0,776	0,648	0,48	0,24	