


For Instructions, please see:
<http://www.erni.com/DB/derating/DERATING-Instructions.pdf>

DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)
 MiniBridge A/P 8p with 250 mm stranded flat ribbon cable AWG 26
 max component temperature 105°C

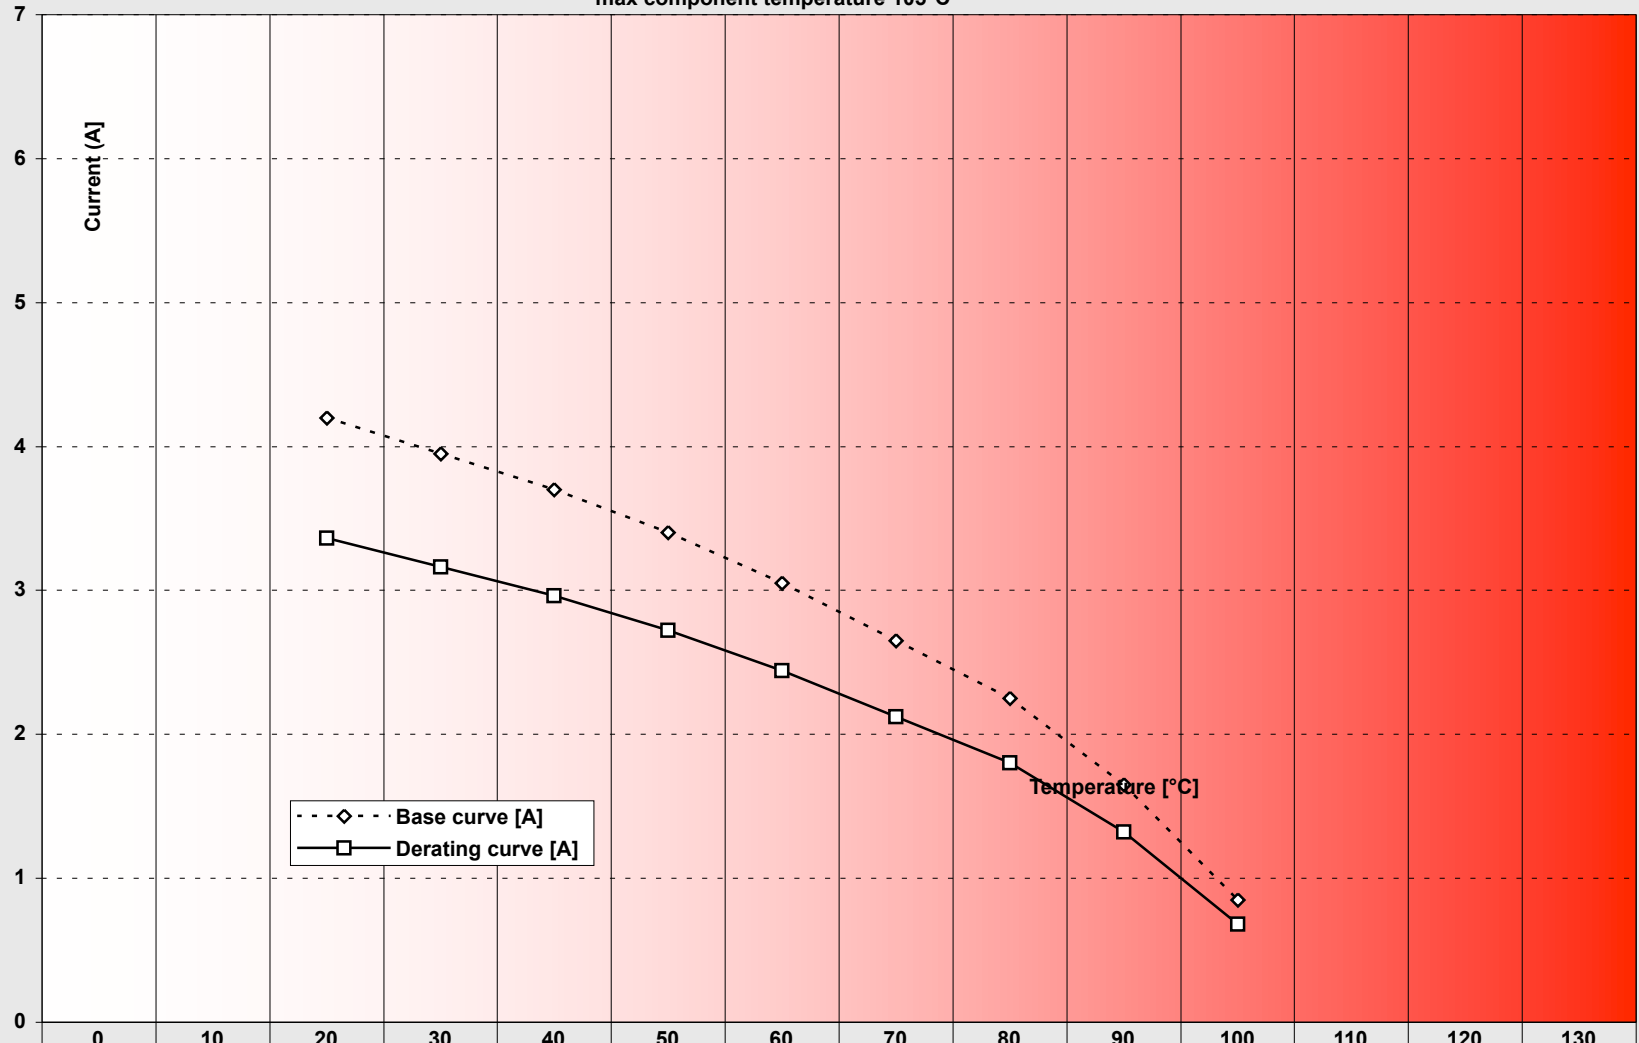

Base curve [A]			4,20	3,95	3,70	3,40	3,05	2,65	2,25	1,65	0,85			
Derating curve [A]			3,36	3,16	2,96	2,72	2,44	2,12	1,80	1,32	0,68			