


For Instructions, please see:

<http://www.erni.com/DB/derating/DERATING-Instructions.pdf>

DERATING CURVE (acc. IEC 60512-5-2) - derating with housing
MaxiBridge DRC , 20 pin, female type B with male type Q, wire Mocar 150C 0,35mm²



applicable to
connector
system only,
current rating
of wiring/cabling
according
dedicated
specification

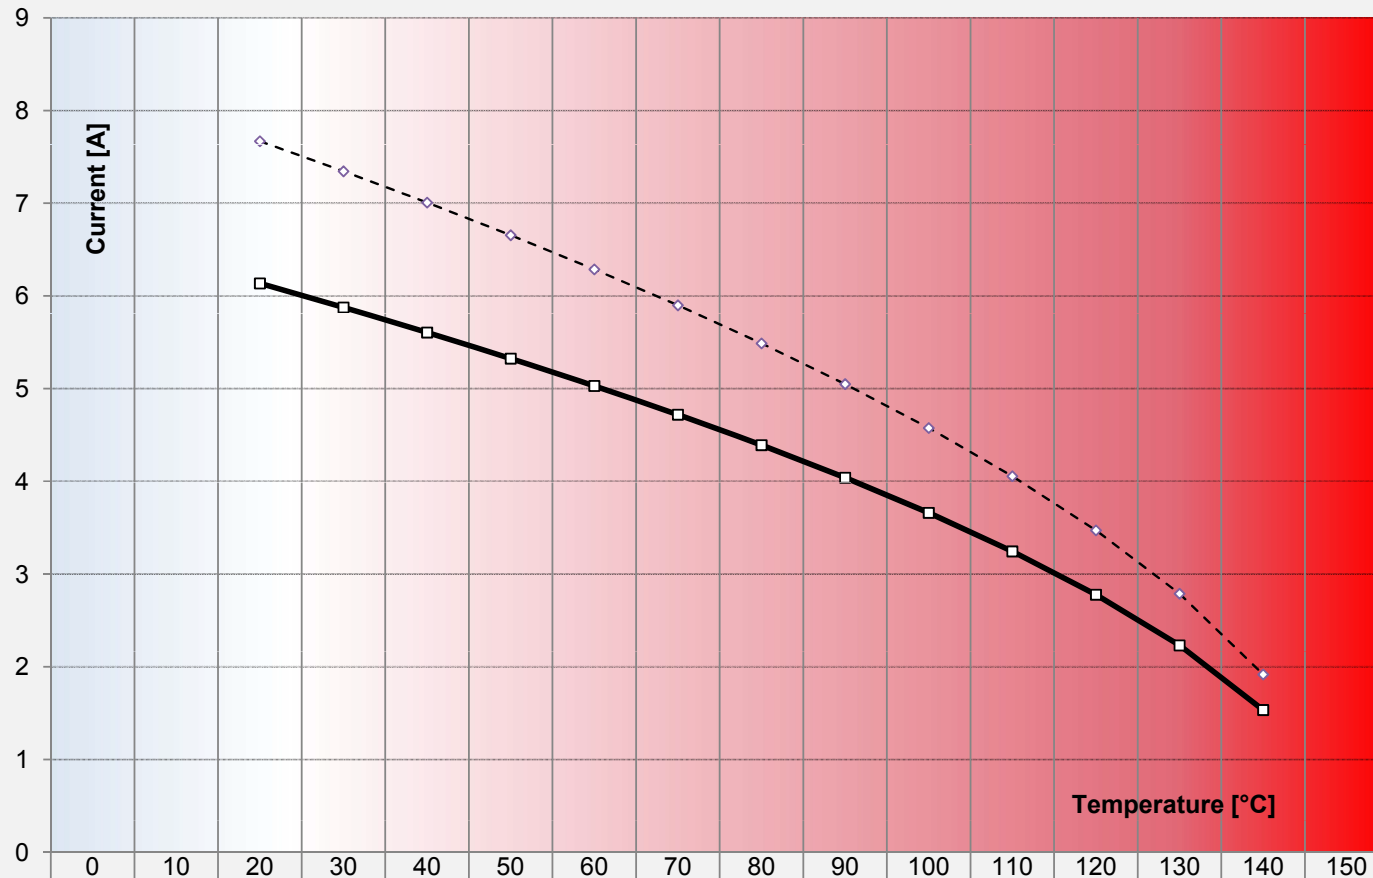

| | | | | | | | | | | | | | | | | |
|-------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| --◇-- Base curve | | | | | | | | | | | | | | | | |
| —■— derated curve | | | | | | | | | | | | | | | | |