


DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)

Maxibridge connector, 5 contacts, with 200 mm insulated stranded discrete wire AWG18
2-layers PCB, max component temperature 150°C

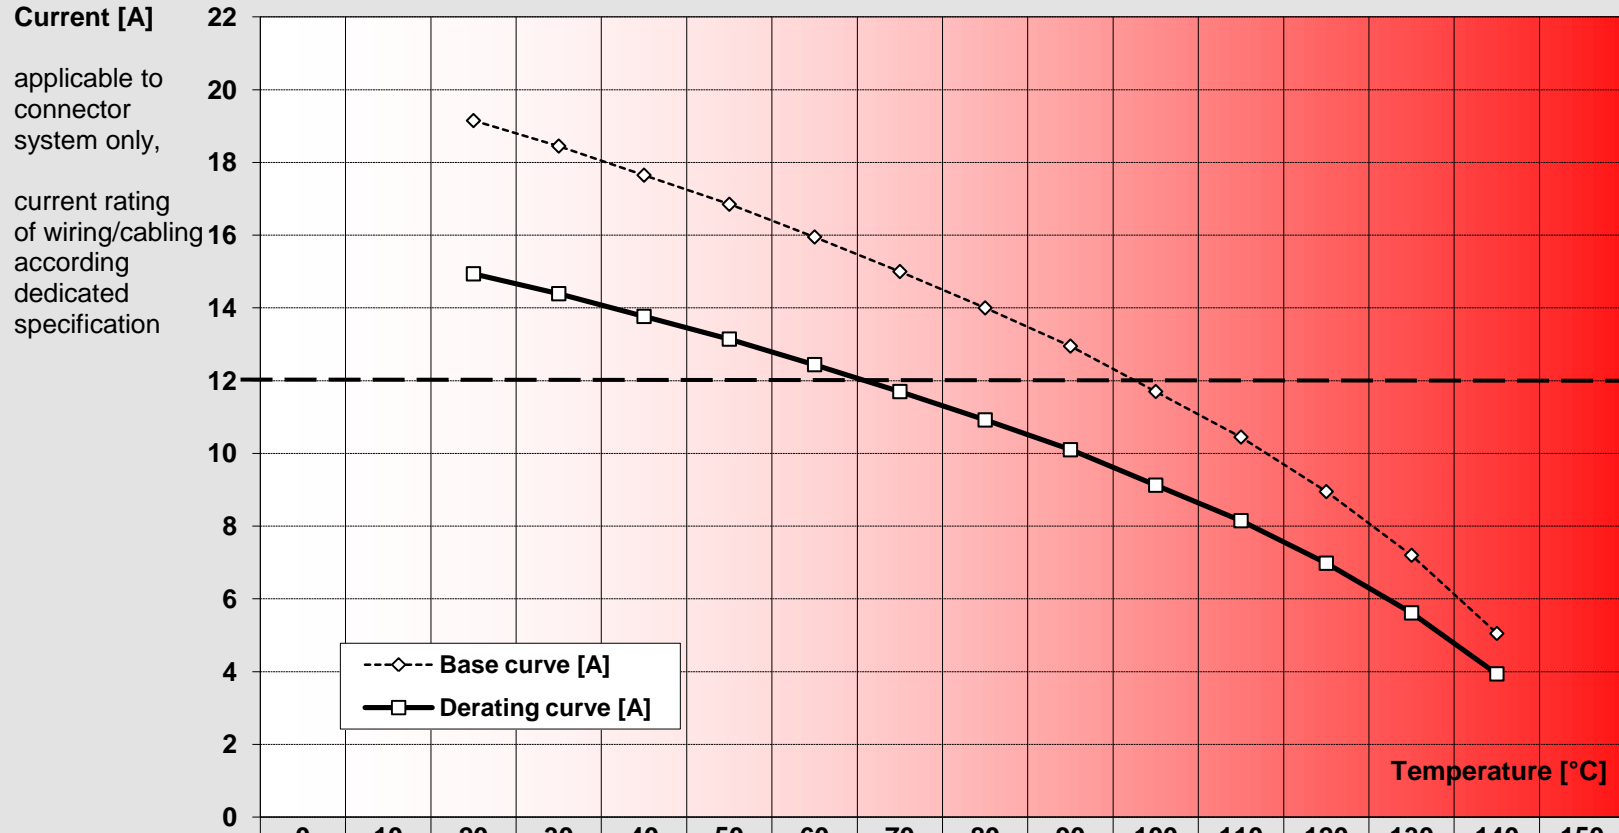

Base curve [A]			19,15	18,45	17,65	16,85	15,95	15	14	12,95	11,7	10,45	8,95	7,2	5,05	
Derating curve [A]			14,94	14,39	13,77	13,14	12,44	11,70	10,92	10,10	9,13	8,15	6,98	5,62	3,94	