


# DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)

Maxibridge connector, 6 contacts, with 200 mm insulated stranded discrete wire AWG18  
2-layers PCB, max component temperature 150°C

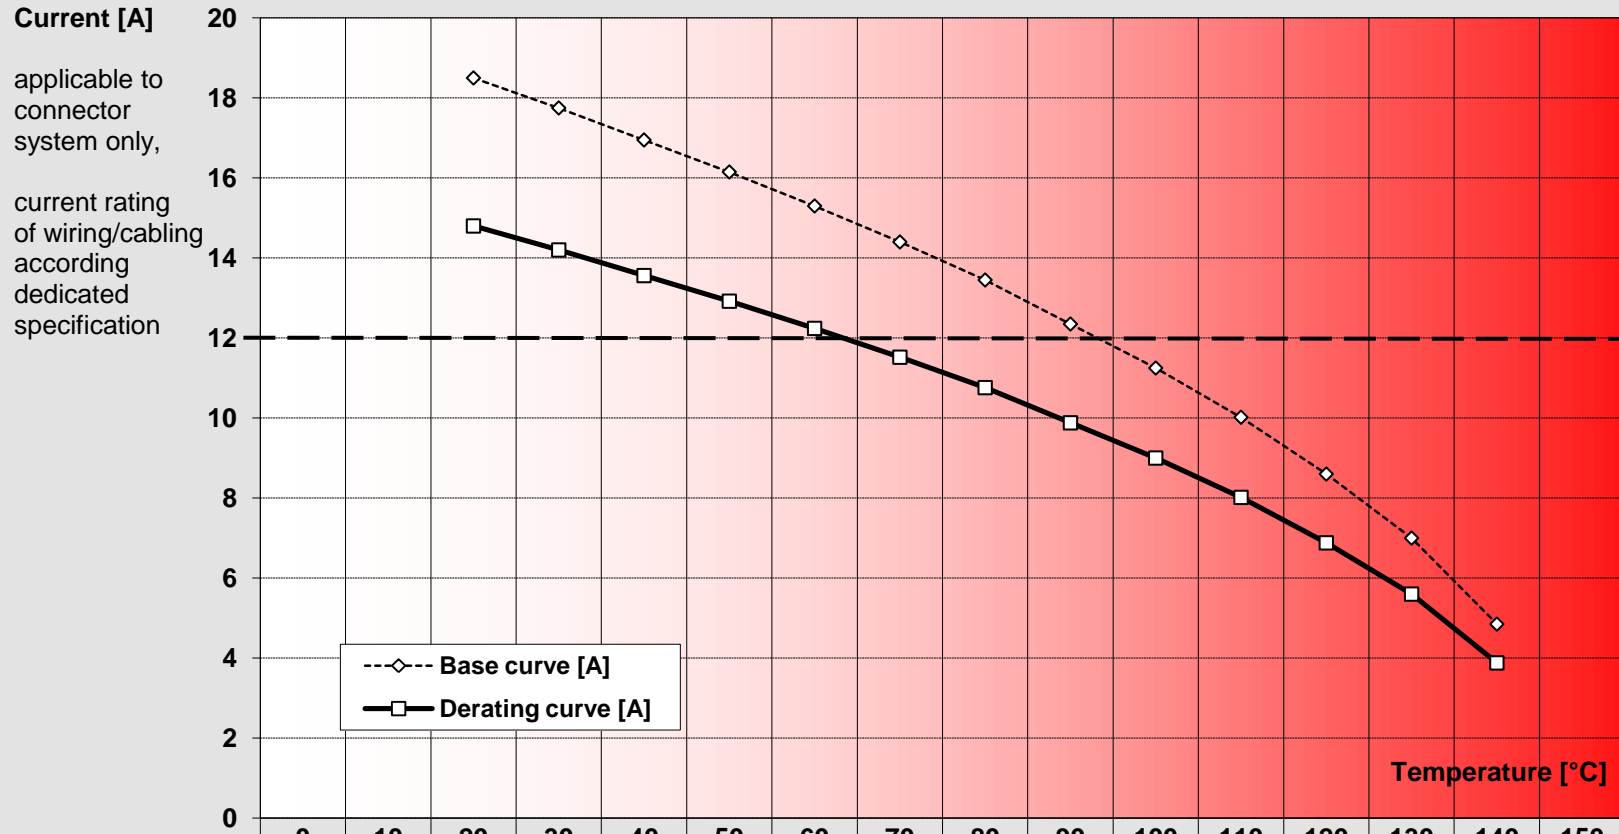

Base curve [A]			18,5	17,75	16,95	16,15	15,3	14,4	13,45	12,35	11,25	10,02	8,6	7	4,85	
Derating curve [A]			14,80	14,20	13,56	12,92	12,24	11,52	10,76	9,88	9,00	8,02	6,88	5,60	3,88	