




zulässiger Mittenversatz in Längs und Querrichtung während des Steckvorgangs  
 jeweils  $\pm 0,7\text{mm}$   
*allowed misalignment in longitudinal and transverse axes  $\pm 0,7\text{mm}$  during the mating operation*

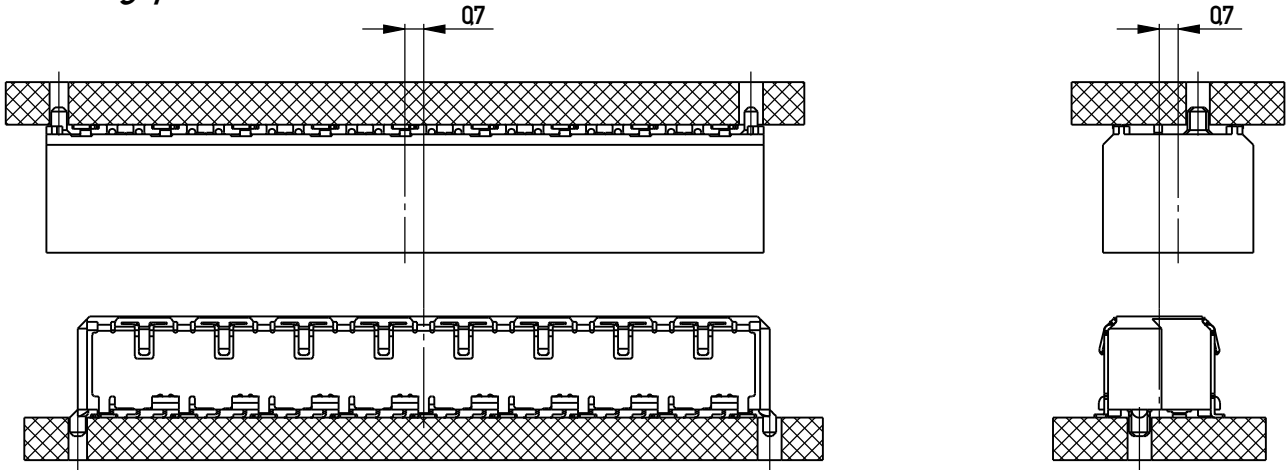

zulässiger Winkelversatz während des Steckvorgangs, längs:  $\pm 2^\circ$ , quer:  $\pm 2^\circ$   
*allowed angular inclination longitudinal:  $\pm 2^\circ$ , transverse:  $\pm 2^\circ$ , during the mating operation*

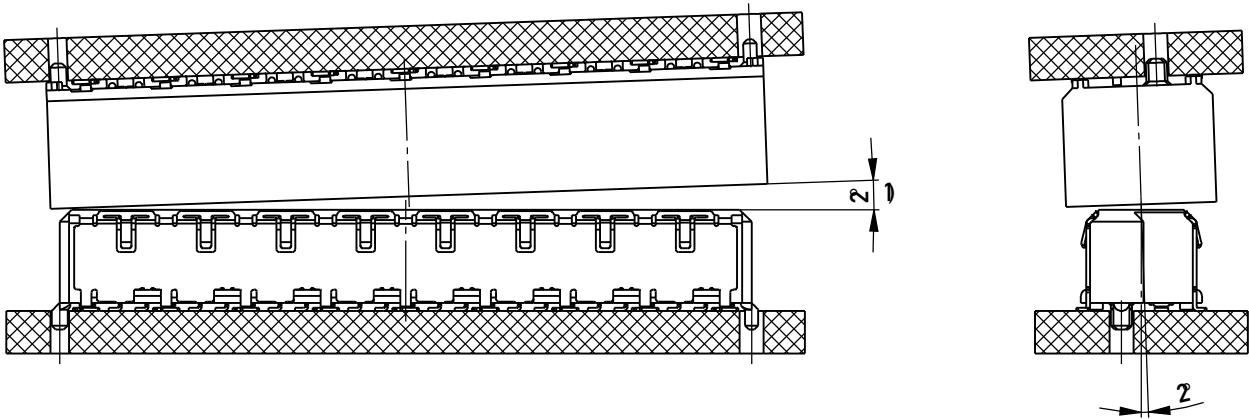

"Board to Board" Abstand für sichere Kontaktgabe: 5,0 - 6,5mm  
*"Board to Board" distance for secure mating: 5,0 - 6,5mm*

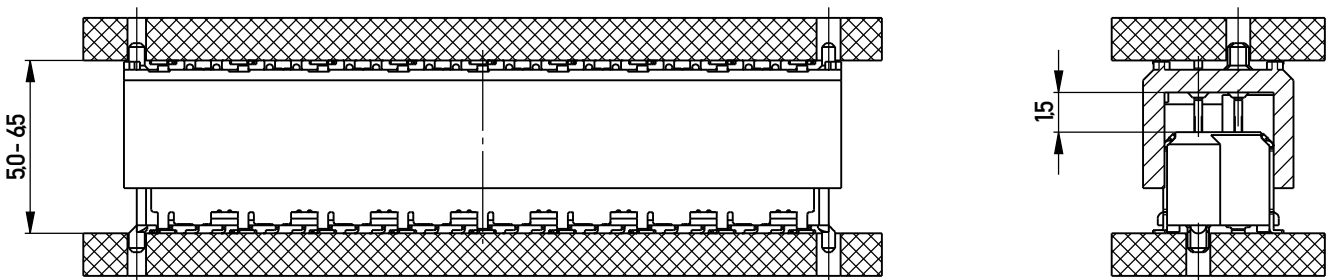

1)  $0,5^\circ$  in Kombination mit Mittenversatz  
 *$0,5^\circ$  in combination with misalignment*

Information:		Tolerances	 All Dimensions in mm	Scale	5:1	*2-reihig *2-row
				Designation	Steckbedingungen MicroSpeed* Mating conditions MicroSpeed*	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		ED4852		I
Copyright by ERNI GmbH Proprietary notice pursuant to ISO 9005 to be observed.		www.ERNI.com		Class MSPEED		A3
Index	20.12.2011	Date				